



DOUBLE-COATED Difference Tape YCM-LH0505AB

Product Description

YCM- LH0505AB Is Acrylic / Silicon Adhesive + PET Base It consists
There is do Characteristics Have there is.

- PET Description Difference streamer (Acrylic / Silicon)
- FPCB, PCB, GLASS Rework and For rework,
- Touch key – Glass REWORK In performance Optimization
- High temperature Environment Even in the process Heat resistance
Performance Excellence
- adhesive and Steamed The residue No leftovers

Product Structure

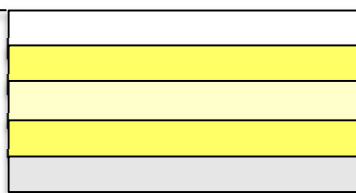

- LINER : Fluoric release film
- ADHESIVE : Silicon
- CARRIER : PET
- ADHESIVE : ACRYLIC
- LINER : White PET Film

Product construction

Properties	Unit	Value	Test Method
Total Thickness	μm	50 ± 10%	Thickness Gauge
Peel Strength	gf/25mm	acryl 1,300 ± 300	KS T – 1028 (SUS 304 Standard)
		Silicone 350 ± 150	KS T – 1028 (SUS 304 Standard)
Holding Power		1mm ↓	80° / 1Hr / 1kg
Heat Resistance		Good	Oven Test

are based on reliable tests , but since product performance may show different results depending on various factors, it is recommended to use it for reference rather than for the purpose of product performance standards.