



## DOUBLE-COATED Difference Tape YCM-LH1010AB

### Product Description

YCM- LH1010AB Is Acrylic / Silicon Adhesive + PET Base It consists  
There is do Characteristics Have there is.

- PET Description Difference streamer (Acrylic / Silicon)
- FPCB, PCB, GLASS Rework and For rework,
- Touch key – Glass REWORK In performance Optimization
- High temperature Environment Even in the process Heat resistance  
Performance Excellence
- adhesive and Steamed The residue No leftovers

### Product Structure

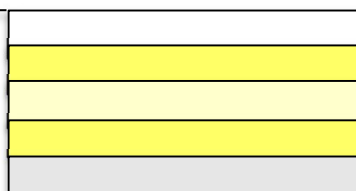

- LINER : PET film
- ADHESIVE : ACRYLIC
- CARRIER : PET
- ADHESIVE : Silicon
- LINER : White PET Film

### Product construction

Properties	Unit	Value	Test Method
Total Thickness	μm	100 ± 10%	Thickness Gauge
Peel Strength	gf/25mm	acryl 2,500	KS T – 1028 (SUS 304 Standard)
		Silicone 1,000	KS T – 1028 (SUS 304 Standard)
Holding Power		1mm ↓	80° / 1Hr / 1kg
Heat Resistance		Good	Oven Test

are based on reliable tests , but since product performance may show different results depending on various factors, it is recommended to use it for reference rather than for the purpose of product performance standards.